


SPECIFICATIONS

1. INTERNAL FRAME IN WHITE PVC
2. TOUGHENED GLASS
3. LAMINATED LOW-E GLASS
4. STRUCTURAL SEAL
5. EXTERNAL FRAME IN WHITE POWDER COATED ALUMINIUM (OTHER RAL COLORS AVAILABLE)
6. EXPANDED POLYURETHANE INSULATING PANEL (STANDARD THICKNESS 60 mm, BESPOKE THICKNESS AVAILABLE)
7. EXISTING CURB OR UPSTAND
8. EXISTING CURB
9. FLAT ROOF WITHOUT CURB
10. ROOFING MEMBRANE (BY OTHERS)

PLEASE NOTE: FLATLIGHT should be installed with a slope between 3° and 30° in order to avoid water pooling on the glass lid. All the upstands by TELFORM already include a standard 3° slope. Different pitch is available upon request.

Every item painted RED in this technical sheet must be considered pre-existing or at the expense of the customer.

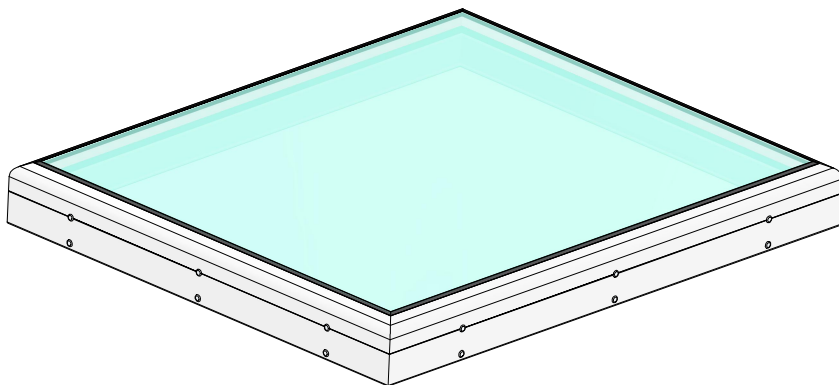

TELFORM

TELFORM NEW GENERATION srl

Via delle Mammole 22 - 70026 Modugno (BA - ITALY)
 TEL +39 080 5375656 FAX +39 080 5375098
 E-MAIL info@telform.it WEB www.telform.it

FIXED FLATLIGHT

Scale	Format	Description:
1 : 5	ISO A4	

This drawing is the property of Telform NG srl and incorporates information which is proprietary. Publication and/or public distribution in whole or in part is expressly prohibited without the prior written consent of Telform NG srl. The information contained herein remains the property of Telform NG srl. All rights reserved.