

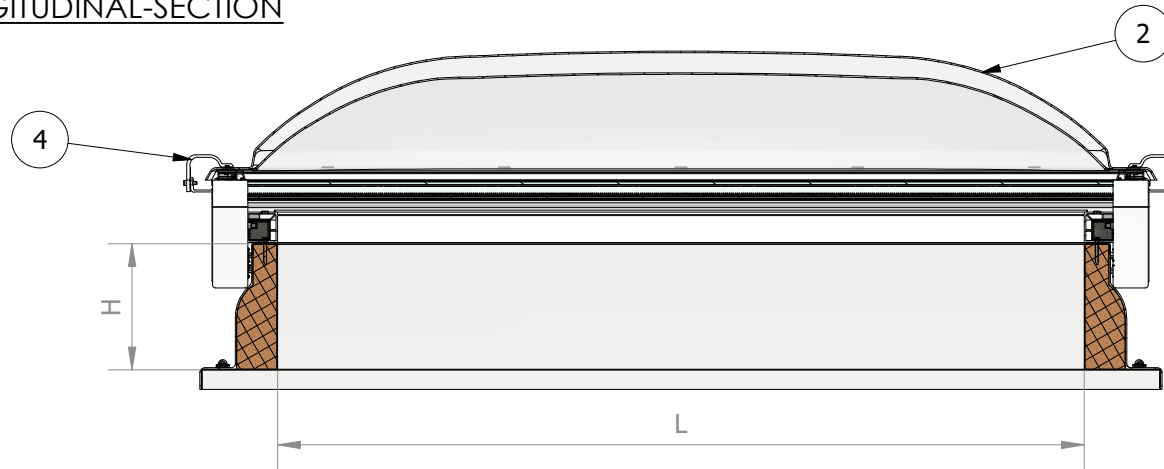


LONGITUDINAL-SECTION

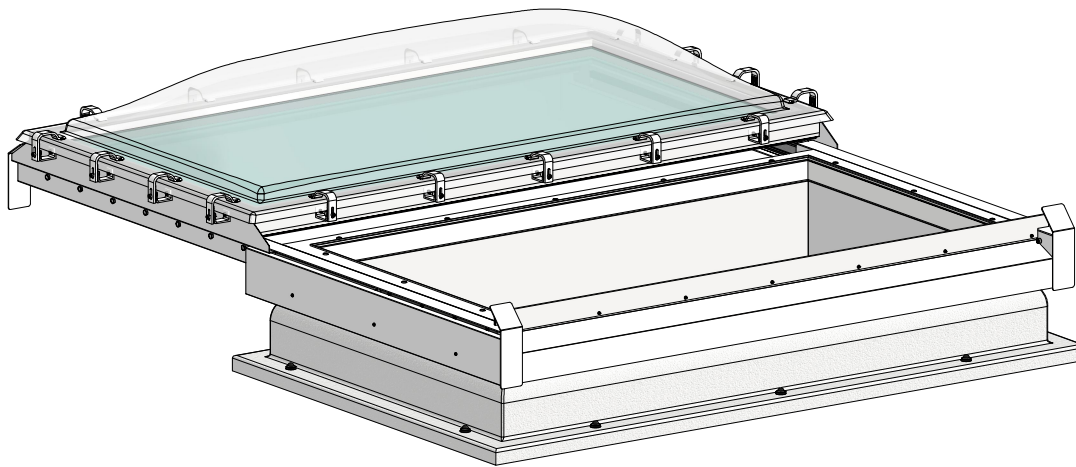


CROSS-SECTION

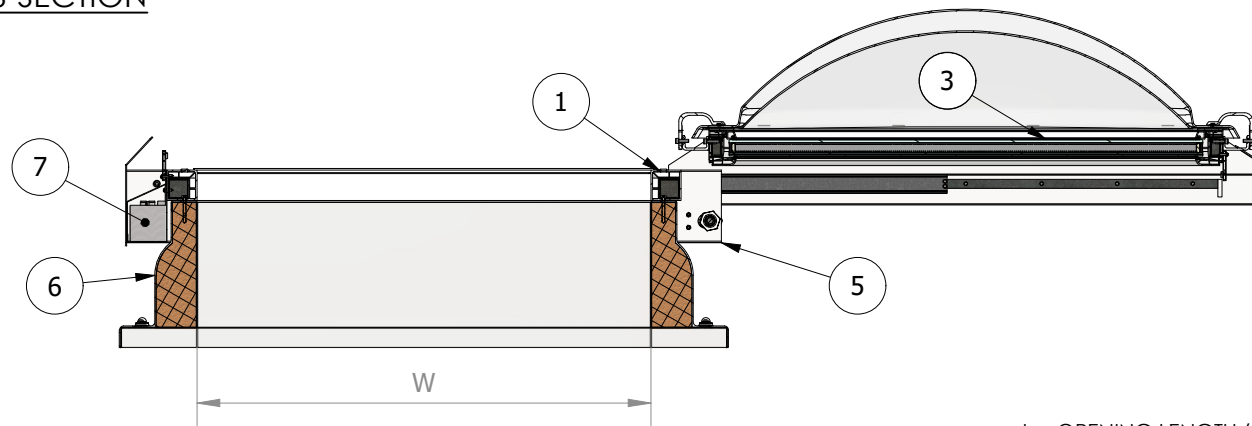

SPECIFICATIONS

1. INTERNAL FRAMES IN WHITE PVC
2. THERMOFORMED DOME MADE OF SINGLE/DOUBLE/TRIPLE LAYER IN PLASTIC (POLYCARBONATE OR ACRYLIC)
3. LOW-E SECURITY GLASS (OPTIONAL)
4. ALUMINIUM FIXING CLAMPS
5. EXTERNAL WHITE POWDER COATED METAL PROFILES (OTHER RAL COLORS AVAILABLE)
6. UPSTAND (CAN BE DONE BY OTHERS ACCORDING TO TELFORM'S SPECIFICATIONS)
7. ACTUATOR - 24 V DC FOR SMOKE VENTILATION

L = OPENING LENGTH (MAX 250 cm FOR SMOKE VENTILATION)
 W = OPENING WIDTH (MAX 130 cm FOR SMOKE VENTILATION)
 H = UPSTAND HEIGHT (MIN 25 cm FOR SMOKE VENTILATION)



TELFORM

TELFORM NEW GENERATION srl

Via delle Mammole 22 - 70026 Modugno (BA - ITALY)
 TEL +39 080 5375656 FAX +39 080 5375098
 E-MAIL info@telform.it WEB www.telform.it

VITAL DOME S ELECTRIC PVC

Scale	Format	Description:
1 : 15	ISO A4	SLIDING SKYLIGHT

This drawing is the property of Telform NG srl and incorporates information which is proprietary. Publication and/or public distribution in whole or in part is expressly prohibited without the prior written consent of Telform NG srl. The information contained herein remains the property of Telform NG srl. All rights reserved.